

GALAXY**LIGHT BAR****HBLB-3232SR****1) ELECTRO – OPTICAL CHARACTERISTICS : (Ta=25)**

SYMBOL	PARAMETER	TEST CONDITION	TYP	MAX	UNIT
V _F	Forward Voltage ,Per Segment	IF=20mA	11	12	V
I _R	Reverse Current , Per Segment	VR=5V		50	μ A
λ _p	Peak Emission Wavelength	IF=20mA	630	635	nm
I _V	Luminous Intensity Per Segment	IF=20mA	20	25	mcd

white diffused byte

2) ABSOLUTE MAXIMUM RATING: (Ta=25)

SYMBOL	PARAMETER	RED	UNIT
P _{AD}	Power Dissipation Per Segment	100	mw
V _R	Reverse Voltage Per Segment	5	V
I _{AF}	Continuous Forward Current Per Segment	20	mA
I _{PF}	Peak Forward Current Per Segment(Duty-0.1,1KHz)	90	mA
---	Derating Linear From 25 Per Segment	0.5	mA
T _{OPr}	Operating Temperature Range	-30 to 80	
T _{stg}	Storage Temperature Range	-30°C to 85°C	
Solder Temperature 1/16 inch Below Seating Plane 3 Seconds at 250°C			
250/5 1.6mm			

DRAWING NO.:

DATE:

2008-06-06

Page:

1



GALAXY

LIGHT BAR

HBLB-3232SR

PACKAGE DIMENSIONS(mm)

3232-B

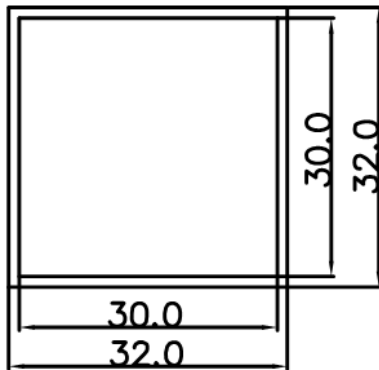

Circuit

4 Pins