



HB8013AUOSR/CUOSR

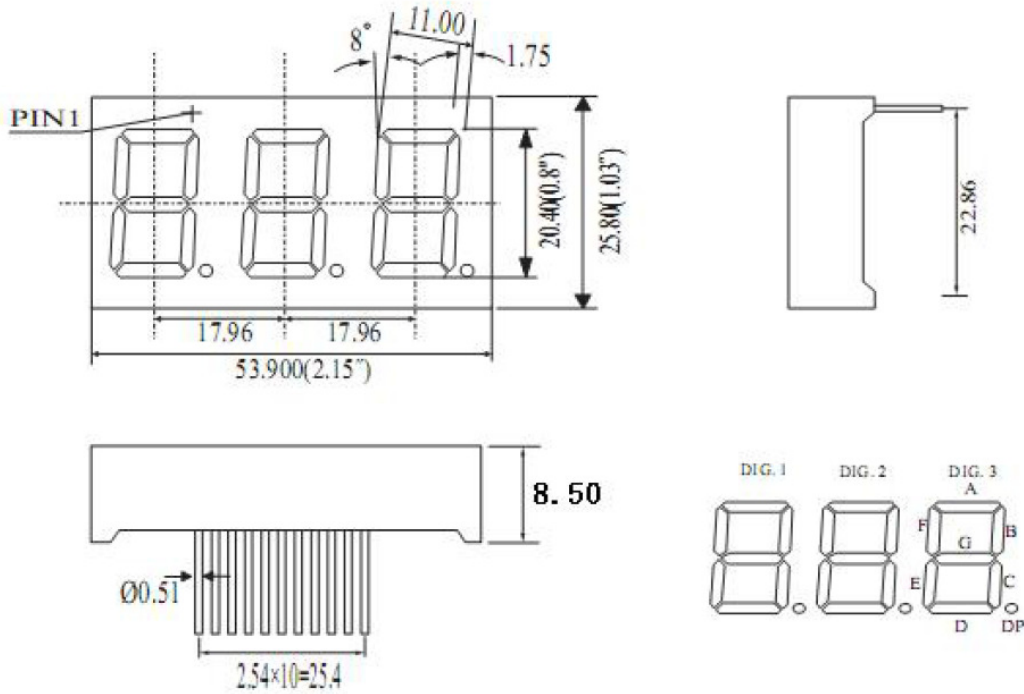


UNIT: MM(INCH) TOLERANCE: $\pm 0.25(0.01)$ "

HB8031AUOSR

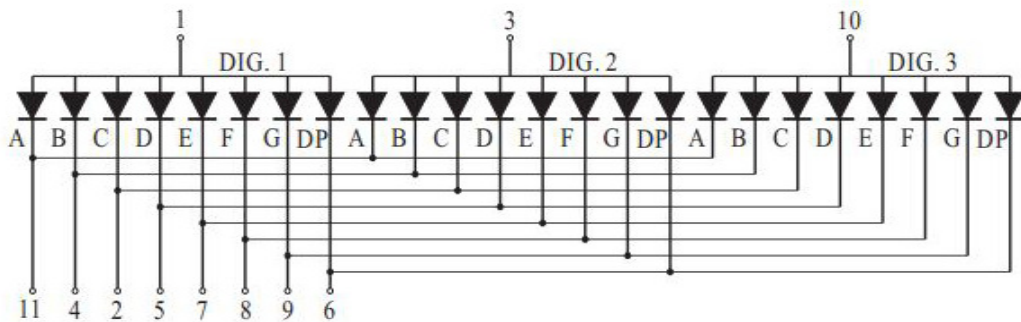

HB8013CUOSR

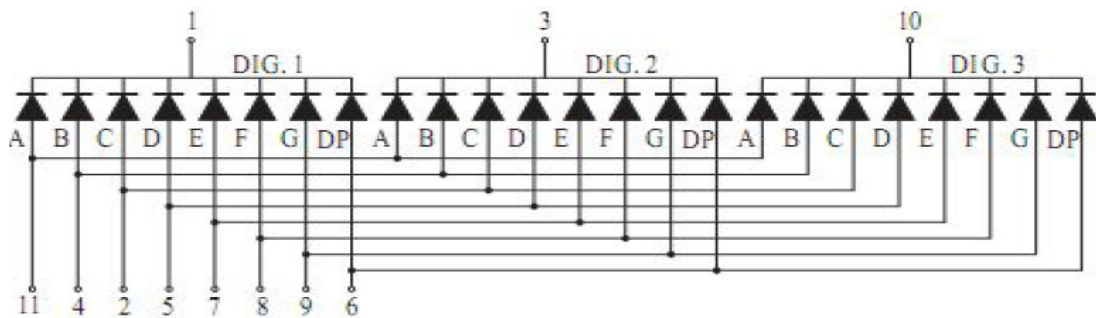

HB8013AUOSR/CUOSR

DESCRIPTION

- 20.32mm (0.8") three digitals displays series, common Cathode ,black face and white segment
- Standard brightness.
- Low current operation.
- Excellent character apperance.
- Easy mounting on P.C.boards or sockets.

产品最大绝对参数值 Absolute maximum ratings (Ta=25°C)

每段参数 PARMETER PER SEGMENT	符号 SYMBOL	最大数 MAX	单位 UNIT
反向电压 Reverse Voltage	VR	5	V/Seg
正向电流 Forward Current	IF	20	mA/Seg
峰值电流 (0.1ms) Peak Faward current(1/10 Duty Cycle)	IPEAK	120	mA/Seg
功耗 Power Dissipation	PA	40	mW/Seg
工作条件温度 Operating Temperature Range	-25°C to +85°C		
储存温度 Storage Temperature Range	-30°C to +85°C		
距离胶体 1.6mm 焊接, 温度 260°C,焊接时间最多 3 秒 Lead soldering Temperatur260°C at 1.6mm Form Body For 3 Seconds			

产品光电参数值 ELECTRICAL/OPTICAL CHARACTERISTICS (Ta=25°C)

参数 PARMETER	符号 SYMBOL	MIN	TYP	MAX	UNIT	测试条件 Test condition
每段亮度 Luminous Intensity Per Segment	Iv	140	155	168	mcd	IF=20mA
每段正向电压 Forward Voltage Per segment	VF	1.8	2.05	2.2	V	IF=20mA
波长 Wavelength	$\lambda p / \lambda d$		625/620		nm	IF=20mA
半波长度 Spectrum width of half value	$\Delta \lambda$		20		nm	IF=20mA
每段反向电流 Reverse Current Per Segment	IR			10	μA	VR=5V

器件表面及封装颜色 Surface / Lens color

Number	0	1	2	3	4
Ref Surface Color	White	Black	Gray	Red	Green
Epoxy Color	Water clear	White Diffused	Red Diffused	Green Diffused	Yellow Diffused

HB8013AUOSR/CUOSR

